

VV/HH

KEMA Labs

High Voltage Fuses

High Voltage Fuse-Links **1128**

Fuse Bases **1146**

f @ in v
/etigroup

ETI
SWITCH TO
A SAFE FUTURE



High Voltage Fuse-Links

High voltage high-breaking capacity fuse-links

General information

ETI HV (High-voltage Current-limiting fuse-links) named VVT TD3 are designed to protect devices in switch-gears and other equipment (distribution transformers, power capacitors, MV motors) from thermal and dynamic effects of short-circuits and over-currents. Time-current characteristics correspond to standard IEC 60282-1, item 3.3.3. Back-up fuse. They are suitable for installation in:

- // indoor and outdoor RMU (Ring-Main Units) switchgear
- // SF6 - insulated enclosures
- // special service conditions (different from normal conditions, described in item 4.1. of standard IEC 60282-1)

The most significant features of ETI VVT TD3 high-voltage fuses:

- // Low temperature rise because of low power dissipation
- // Low minimum breaking currents
- // High breaking capacity 63 kA (up to 24kV)
- // Two types of striker pins: 50N and 80 N (with integrated temperature dependent limiter)
- // Reliable sealing system against humidity irruption
- // Low switching voltages
- // Upon a request, fuse links can be supplied into non-standard dimensions

Overview of standard and non-standard dimensions

ETI VV TD3	1A	2A	4A	6A	6,3A	10A	16A	20A	25A	31,5A	32A	40A	50A	63A	80A	100A	125A	160A	200A	250A	315A	
6/7,2 kV	192 x Ø 53												192 x Ø 68									
	292 x Ø 53												292 x Ø 68		192 x Ø 83,5							
	442 x Ø 53												442 x Ø 68				292 x Ø 83,5					
																			442 x Ø 83,5			
10/12 kV	192 x Ø 53						192 x Ø 68						292 x Ø 68									
	292 x Ø 53												292 x Ø 68		292 x Ø 83,5							
	442 x Ø 53												442 x Ø 68				442 x Ø 83,5		537 x Ø 83,5			
																			537 x Ø 83,5			
15/17,5 kV	292 x Ø 53						292 x Ø 68						292 x Ø 83,5									
	367 x Ø 53												367 x Ø 68		367 x Ø 83,5							
	442 x Ø 53												442 x Ø 68				442 x Ø 83,5					
																			442 x Ø 83,5			
20/24 kV	292 x Ø 53						292 x Ø 68						292 x Ø 83,5									
	442 x Ø 53												442 x Ø 68		442 x Ø 83,5							
	537 x Ø 53												537 x Ø 68				537 x Ø 83,5					
																			537 x Ø 83,5			
30/36 kV	442 x Ø 53						537 x Ø 53						537 x Ø 68									
	537 x Ø 53												537 x Ø 68		537 x Ø 83,5							

* purple: standard dimensions

** green: non-standard dimensions



Reliable sealing system against humidity irruption



- /// KEMA type test reports
- /// High endurance ceramic tube
- /// Low temperature rise because of low power dissipation
- /// Low minimum breaking currents
- /// Low switching voltages
- /// High breaking capacity 63 kA
- /// Galvanically protected contact caps made of electrolytic copper can be nickel (Ni), tin (Sn) or silver (Ag) plated



- /// Striker system: a temperature sensitive element, which does not react to short time overloads, only to inadmissible values of temperatures. Convenient for the protection of the fuse-links, installed in enclosures or SF6 switchgears
- /// Rigid striker pin
- /// Various striker variants (50N, 80N, without striker, thermo, non-thermo...)
- /// Silver melting element
- /// Easier mounting because of improved contact cap

Standards

ETI MV/VV High voltage fuse-links comply with the following standards and specifications:

- /// IEC 60282-1 "Current-limiting fuses", Edition 8.0 from 2020-04
- /// DIN 43625 "Hochspannungs-Sicherungen; Nennspannung 3,6 bis 36kV; maÙe für Sicherungseinsätze"
- /// VDE 0670 T402, Wechselstromschaltgeräte für Spannungen über 1kV, "Auswahl von strombegrenzenden Sicherungseinsätzen für Transformatorstromkreise"

- /// IEC TR 62655 "Tutorial and application guide for high-voltage fuses"
- /// IEC 60644 "Specification for high-voltage fuse-links for motor circuit applications"
- /// IEC 60549 "High-voltage fuses for external protection of shunt capacitors"

Certificates, Test reports

- /// KEMA Type Test Certificates of breaking performance
- /// Test reports for 25kV, 38.5kV, 40.5kV and 42kV versions

Construction:

ETI High voltage fuse-links are designed to assure stable and reliable technical characteristics. The glazed porcelain tube (made in ETI own ceramic factory) is extremely high mechanical and thermal resistant.

Galvanically protected contact caps made of electrolytic copper are nickel (Ni) or tin (Sn) or upon customer request silver (Ag) plated. Caps are rolled by pressing into the groove of the tube. The tightness of this connection is assured by a special seal resistant to ageing and high temperatures.

The design and method of production of the melting elements ensures precisely tolerances and stable time/current characteristics. Fuse elements are wounded on a ceramic carrier and electrically welded on a special copper strips.

The inside of the tube is filled with quartz sand with an exactly determined granulation and chemical structure. The sand guarantees good and reliable extinguishing of the electric arc.

An important element in the fuse-link construction is also the striker system. Part of that system is temperature sensitive element, which reacts in cases of temperature increasing of the fuse-link due to various reasons. The system reacts in such a way that short time overloads do not cause the fuse to interrupt the circuit unnecessarily. Only when inadmissible values of temperatures are exceeded, the fuse-link open the switch via the striker pin.


Because of these characteristics, ETI "thermal" striker pin is convenient for the protection of the fuse-links, installed in enclosures or SF6 switchgears, which requires additional protection features against inadmissible temperatures.

Striker pin Type description:

- /// VVA3; without striker
- /// VVC3; 50N striker force.
- /// VVT-D3; 80N striker force, with temperature limiter (VVT)

VV / High Voltage Fuse-Links

Ordering Code Numbers

rated voltage U_n [kV]	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVA (without striker pin)	VVC3 Striker type 50N	VVT-D3 Striker type 80N THERMO		Tube diameter "d" (mm)	
					Ni plated contacts	Ag plated contacts*		
192		1 A	004221102				53	1.1
		2 A	004221103	004220003	004222003	004222033		
		4 A	004221104	004220004	004222004	004222034		
		6 A	004221105	004220005	004222005	004222035		
		6,3 A	004221106	004220006	004222006	004222036		
		10 A	004221107	004220007	004222007	004222037		
		16 A	004221108	004220008	004222008	004222038		
		20 A	004221109	004220009	004222009	004222039		
		25 A	004221110	004220010	004222010	004222040		
		31,5 A	004221111	004220011	004222011	004222041		
		32 A	004221112	004220012	004222012	004222042		
		40 A	004221113	004220013	004222013	004222043		
		50A	004221114	004220014	004222014	004222044		
		63 A	004221115	004220015	004222015	004222045		
		80 A	004221116	004220016	004222016	004222046		
100 A	004221117	004220017	004222017	004222047				
125 A	004221118	004220018	004222018	004222048				
160 A	004221119	004220019	004222019	004222049				
3/7.2	292	2 A		004220503	004222503		53	1.6
		4 A		004220504	004222504			
		6 A		004220505	004222505			
		6,3 A		004220506	004222506			
		10 A		004220507	004222507			
		16 A		004220508	004222508			
		20 A		004220509	004222509			
		25 A		004220510	004222510			
		31,5 A		004220511	004222511			
		32 A		004220512	004222512			
		40 A		004220513	004222513			
		50 A		004220514	004222514			
		63 A		004220515	004222515			
		80 A		004220516	004222516			
		100 A		004220517	004222517			
125 A		004220518	004222518					
160 A		004220519	004222519					
200 A		004220520	004222520					
250 A		004220521	004222521					
442		2 A		004220603	004222603		68	3.9
		4 A		004220604	004222604			
		6 A		004220605	004222605			
		6,3 A		004220606	004222606			
		10 A		004220607	004222607			
		16 A		004220608	004222608			
		20 A		004220609	004222609			
		25 A		004220610	004222610			
		31,5 A		004220611	004222611			
		32 A		004220612	004222612			
		40 A		004220613	004222613			
		50 A		004220614	004222614			
		63 A		004220615	004222615			
		80 A		004220616	004222616			
		100 A		004220617	004222617			
125 A		004220618	004222618					
160 A		004220619	004222619					
200 A		004220620	004222620					
250 A		004220621	004222621					
315 A		004220622	004222622					



Note 1: Other ratings and dimensions can be supplied by customer request. For particular applications, please contact ETI technical team.

Note 2: Orange colored types according to IEC 60282-1 dimensions.

* Other dimensions available upon request

Technical data

Rated voltage	Dimension "e" according to DIN and IEC	Rated current	Striker type	Rated breaking capacity	Rated minimum breaking current	Cold resistance	Power dissipation	Pre-arcing I ² t value	Total I ² t value
[kV]	[mm]	I _n [A]		[kA]	[A]	[mΩ]	[W]	[A ² s]	[A ² s]
192	192	1	C, D	63	12	1170	3		
		2			12	580	4	6,1	57
		4			20	370	9	17,3	164
		6			25	260	10	36	340
		6,3			25	260	10	36	340
		10			43	75	9	165	1.450
		16			56	44	14	320	5.200
		20			70	27	12,5	450	7.000
		25			87	21	16	700	10.000
		31,5			110	18	23,5	1.400	15.000
		32			110	18	25	1.400	15.000
		40			140	13	28,5	3.200	27.000
		50			175	10,5	35,5	5.800	44.000
		63			220	7,5	42,5	12.000	70.000
		80			280	5,9	59	19.000	140.000
		100			360	4,8	73	35.000	202.000
		125			450	3,9	101	55.000	300.000
160	600	3	144	94.000	580.000				
3/7.2	292	2	C, D	63	12	580	4	6,1	57
		4			20	370	9	17,3	164
		6			25	260	10	36	340
		6,3			25	260	10	36	340
		10			43	75	9	165	1.450
		16			56	44	14	320	5.200
		20			70	27	12,5	450	7.000
		25			87	21	16	700	10.000
		31,5			110	18	23,5	1.400	15.000
		32			110	18	25	1.400	15.000
		40			140	13	28,5	3.200	27.000
		50			175	10,5	35,5	5.800	44.000
		63			220	7,5	42,5	12.000	70.000
		80			280	5,9	59	19.000	140.000
		100			360	4,8	73	35.000	202.000
		125			450	3,9	101	55.000	300.000
		160			600	3	144	94.000	580.000
200	1000	2,1	155	151.780	789.270				
250	1250	1,7	196	228.610	1.188.800				
442	442	2	C, D	63	12	840	4,7	6,1	57
		4			20	530	11,7	17,3	164
		6			25	270	13,4	36	340
		6,3			25	270	13,4	36	340
		10			43	90	11	165	1.450
		16			56	53	16	320	5.200
		20			70	32	15	450	7.000
		25			87	25	19	700	10.000
		31,5			110	21,5	28	1.400	15.000
		32			110	21,5	30	1.400	15.000
		40			140	15,5	34	3.200	27.000
		50			175	12,6	43	5.800	44.000
		63			220	9	51	12.000	70.000
		80			280	7,1	71	19.000	140.000
		100			360	5,8	88	35.000	202.000
		125			450	4,7	121	55.000	300.000
		160			600	3,6	173	94.000	580.000
200	1000	2,65	195	151.780	789.270				
250	1250	2,2	253	228.610	1.188.800				
315	1575	1,75	320	368.640	1.916.930				

VV / High Voltage Fuse-Links

Ordering Code Numbers

rated voltage U_n [kV]	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVA (without striker pin)	VVC3 Striker type 50N	VVT-D3 Striker type 80N THERMO		Tube diameter "d" (mm)	kg		
					Ni plated contacts	Ag plated contacts*				
6/12	192	2 A		004230103	004232103		53	1.1		
		4 A		004230104	004232104					
		6 A		004230105	004232105					
		6,3 A		004230106	004232106					
		10 A		004230107	004232107					
		16 A		004230108	004232108					
		20 A		004230109	004232109					
		25 A		004230110	004232110		68	1.7		
		31,5 A		004230111	004232111					
		32 A		004230112	004232112					
		40 A		004230113	004232113					
		50 A		004230114	004232114					
		1 A	004231102						53	1.6
		2 A	004231103	004230003	004232003	004232033				
4 A	004231104	004230004	004232004	004232034						
6 A	004231105	004230005	004232005	004232035						
6,3 A	004231106	004230006	004232006	004232036						
10 A	004231107	004230007	004232007	004232037						
16 A	004231108	004230008	004232008	004232038						
20 A	004231109	004230009	004232009	004232039						
25 A	004231110	004230010	004232010	004232040						
31,5 A	004231111	004230011	004232011	004232041						
32 A	004231112	004230012	004232012	004232042						
40 A	004231113	004230013	004232013	004232043						
50 A	004231114	004230014	004232014	004232044	68	2.8				
63 A	004231115	004230015	004232015	004232045						
80 A	004231116	004230016	004232016	004232046						
100 A	004231117	004230017	004232017	004232047						
125 A	004231118	004230018	004232018	004232048						
160 A	004231119	004230019	004232019	004232049						
2 A		004230503	004232503				53	2.3		
4 A		004230504	004232504							
6 A		004230505	004232505							
6,3 A		004230506	004232506							
10 A		004230507	004232507							
16 A		004230508	004232508							
20 A		004230509	004232509							
25 A		004230510	004232510							
31,5 A		004230511	004232511		68	3.9				
32 A		004230512	004232512							
40 A		004230513	004232513							
50 A		004230514	004232514							
63 A		004230515	004232515							
80 A		004230516	004232516							
100 A		004230517	004232517				83,5	5.8		
125 A		004230518	004232518							
160 A		004230519	004232519							
200 A		004230520	004232520							
160 A		004230619	004232619		83,5	7.0				
200 A		004230620	004232620							
250 A		004230621	004232621							



Note 1: Other ratings and dimensions can be supplied by customer request. For particular applications, please contact ETI technical team.


Note 2: Orange colored types according to IEC 60282-1 dimensions.

* Other dimensions available upon request

Technical data

Rated voltage	Dimension "e" according to DIN and IEC	Rated current	Striker type	Rated breaking capacity	Rated minimum breaking current	Cold resistance	Power dissipation	Pre-arcing I ² t value	Total I ² t value
[kV]	[mm]	I _n [A]		[kA]	[A]	[mΩ]	[W]	[A ² s]	[A ² s]
6/12	192	2	C, D	50	12	980	6	6,1	57
		4			20	650	15	17,3	164
		6			27	435	21	36	340
		6,3			27	435	21	36	340
		10			42	130	15	165	1.450
		16			64	70	24	320	5.200
		20			80	44	21	450	7.000
		25			100	33	28	700	10.000
		31,5			126	29	40	1.400	15.000
		32			126	29	43	1.400	15.000
		40			160	21	48	3.200	27.000
		50			200	16,5	58	5.800	44.000
		1			12	1970	5		
		2			12	980	6	6,1	57
		4			20	650	15	17,3	164
6	25	435	21	36	340				
6,3	25	435	21	36	340				
10	43	130	15	165	1.450				
16	56	70	24	320	5.200				
20	70	44	21	450	7.000				
25	87	33	28	700	10.000				
31,5	110	29	40	1.400	15.000				
32	110	29	43	1.400	15.000				
40	140	21	48	3.200	27.000				
50	175	16,5	58	5.800	44.000				
63	220	12	74	12.000	70.000				
80	280	9	96	19.000	140.000				
100	360	6,7	105	35.000	202.000				
125	450	5,2	138	55.000	300.000				
160	600	4,1	190	94.000	580.000				
6/12	442	2	C, D	63	12	980	6	6,1	57
		4			20	650	15	17,3	164
		6			25	435	21	36	340
		6,3			25	435	21	36	340
		10			43	130	15	165	1.450
		16			56	70	24	320	5.200
		20			70	44	21	450	7.000
		25			87	33	28	700	10.000
		31,5			110	29	40	1.400	15.000
		32			110	29	43	1.400	15.000
		40			140	21,5	48	3.200	27.000
		50			175	16,5	58	5.800	44.000
		63			220	12	74	12.000	70.000
		80			280	9	96	19.000	140.000
		100			360	6,7	105	35.000	202.000
125	450	5,2	138	55.000	300.000				
160	600	4,1	190	94.000	580.000				
200	1000	3,3	238	151.780	789.270				
6/12	537	160	C, D	63	600	4,1	179	94.000	580.000
		200			1000	3,3	238	151.780	789.270
		250			1250	2,65	305	228.610	1.188.800

Ordering Code Numbers

rated voltage U_n [kV]	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVA (without striker pin)	VVC3 Striker type 50N	VVT-D3 Striker type 80N THERMO		Tube diameter "d" (mm)	
					Ni plated contacts	Ag plated contacts*		
292	292	2 A		004240103	004242103		53	1.6
		4 A		004240104	004242104			
		6 A		004240105	004242105			
		6,3 A		004240106	004242106			
		10 A		004240107	004242107			
		16 A		004240108	004242108			
		20 A		004240109	004242109			
		25 A		004240110	004242110		68	2.8
		31,5 A		004240111	004242111			
		32 A		004240112	004242112			
		40 A		004240113	004242113			
		50A		004240114	004242114			
		63 A		004240115	004242115		83,5	4.0
		80 A		004240116	004242116			
		100 A		004240117	004242117			
		10/17,5	367	1 A	004241102			
2 A	004241103			004240003	004242003	004242033		
4 A	004241104			004240004	004242004	004242034		
6 A	004241105			004240005	004242005	004242035		
6,3 A	004241106			004240006	004242006	004242036		
10 A	004241107			004240007	004242007	004242037		
16 A	004241108			004240008	004242008	004242038		
20 A	004241109			004240009	004242009	004242039		
25 A	004241110			004240010	004242010	004242040		
31,5 A	004241111			004240011	004242011	004242041		
32 A	004241112			004240012	004242012	004242042		
40 A	004241113			004240013	004242013	004242043		
50 A	004241114			004240014	004242014	004242044		
63 A	004241115			004240015	004242015	004242045	68	3.1
80A	004241116			004240016	004242016	004242046		
100 A	004241117			004240017	004242017	004242047		
125A	004241118			004240018	004242018	004242048		
160 A	004241119	004240019	004242019	004242049	83,5	4.6		
442	442	2 A		004240503	004242503		53	2.3
		4 A		004240504	004242504			
		6 A		004240505	004242505			
		6,3 A		004240506	004242506			
		10 A		004240507	004242507			
		16 A		004240508	004242508			
		20 A		004240509	004242509			
		25 A		004240510	004242510			
		31,5 A		004240511	004242511			
		32 A		004240512	004242512			
		40 A		004240513	004242513			
		50 A		004240514	004242514			
		63 A		004240515	004242515		68	3.9
		80A		004240516	004242516			
		100 A		004240517	004242517			
		125 A		004240518	004242518			



How to select the suitable HV fuse-links using the FuseSpline tool



Note 1: Other ratings and dimensions can be supplied by customer request. For particular applications, please contact ETI technical team.

Note 2: Orange colored types according to IEC 60282-1 dimensions.


* Other dimensions available upon request

Technical data

Rated voltage	Dimension "e" according to DIN and IEC	Rated current	Striker type	Rated breaking capacity	Rated minimum breaking current	Cold resistance	Power dissipation	Pre-arcing I ² t value	Total I ² t value
[kV]	[mm]	I _n [A]		[kA]	[A]	[mΩ]	[W]	[A ² s]	[A ² s]
10/17.5	292	2	C, D	50	12	1400	8	6,1	57
		4			20	900	17	17,3	164
		6			27	670	35	36	340
		6,3			27	670	35	36	340
		10			42	160	20	165	1.450
		16			64	95	31	320	5.200
		20			80	58	29	450	7.000
		25			100	45	36	700	10.000
		31,5			126	38	51	1.400	15.000
		32			126	38	53	1.400	15.000
	40	160	28	64	3.200	27.000			
	50	200	21,5	75	5.800	44.000			
	63	252	16,5	100	12.000	70.000			
	80	320	12,5	130	19.000	140.000			
	100	400	9	150	35.000	202.000			
	1	12	2800	6					
	2	12	1400	8	6,1	57			
	4	20	900	17	17,3	164			
	6	25	670	35	36	340			
	6,3	25	670	35	36	340			
10	42	160	20	165	1.450				
16	56	95	31	320	5.200				
20	70	58	29	450	7.000				
25	87	45	36	700	10.000				
31,5	110	38	51	1.400	15.000				
32	110	38	53	1.400	15.000				
40	140	28	64	3.200	27.000				
50	175	21,5	75	5.800	44.000				
63	220	16,5	100	12.000	70.000				
80	280	12,5	130	19.000	140.000				
100	360	9	150	35.000	202.000				
125	450	7,5	210	55.000	300.000				
160	600	5,6	290	94.000	580.000				
442	367	2	C, D	63	12	1400	8	6,1	57
		4			20	900	17	17,3	164
		6			25	670	35	36	340
		6,3			25	670	35	36	340
		10			42	160	20	165	1.450
		16			56	95	31	320	5.200
		20			70	58	29	450	7.000
		25			87	45	36	700	10.000
		31,5			110	38	51	1.400	15.000
		32			110	38	53	1.400	15.000
	40	140	28	64	3.200	27.000			
	50	175	21,5	75	5.800	44.000			
	63	220	16,5	100	12.000	70.000			
	80	280	12,5	130	19.000	140.000			
	100	360	9	150	35.000	202.000			
	125	450	7,5	210	55.000	300.000			
	160	600	5,6	290	94.000	580.000			

VV / High Voltage Fuse-Links

Ordering Code Numbers

rated voltage U_n [kV]	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVA (without striker pin)	VVC3 Striker type 50N	VVT-D3 Striker type 80N THERMO		Tube diameter "d" (mm)	 kg		
					Ni plated contacts	Ag plated contacts*				
10/24	292	2 A		004250103	004252103		53	1.6		
		4 A		004250104	004252104					
		6 A		004250105	004252105					
		6,3 A		004250106	004252106					
		10 A		004250107	004252107					
		16 A		004250108	004252108					
		20 A		004250109	004252109		68	2.8		
		25 A		004250110	004252110					
		31,5 A		004250111	004252111					
		32 A		004250112	004252112					
		40 A		004250113	004252113					
		50 A		004250114	004252114		83,5	4.0		
		63 A		004250115	004252115					
		10/24	442	1 A	004251102				53	2.3
				2 A	004251103	004250003	004252003	004252033		
4 A	004251104			004250004	004252004	004252034				
6 A	004251105			004250005	004252005	004252035				
6,3 A	004251106			004250006	004252006	004252036				
10 A	004251107			004250007	004252007	004252037				
16 A	004251108			004250008	004252008	004252038				
20 A	004251109			004250009	004252009	004252039				
25 A	004251110			004250010	004252010	004252040				
31,5 A	004251111			004250011	004252011	004252041				
32 A	004251112			004250012	004252012	004252042				
40 A	004251113			004250013	004252013	004252043				
50 A	004251114			004250014	004252014	004252044	68	3.9		
63 A	004251115			004250015	004252015	004252045				
80 A	004251116			004250016	004252016	004252046				
100 A	004251117	004250017	004252017	004252047						
125 A	004251118	004250018	004252018	004252048						
10/24	537	2 A		004250503	004252503		53	2.8		
		4 A		004250504	004252504					
		6 A		004250505	004252505					
		6,3 A		004250506	004252506					
		10 A		004250507	004252507					
		16 A		004250508	004252508					
		20 A		004250509	004252509					
		25 A		004250510	004252510					
		31,5 A		004250511	004252511					
		32 A		004250512	004252512					
		40 A		004250513	004252513					
		50 A		004250514	004252514				68	4.7
		63 A		004250515	004252515					
		80 A		004250516	004252516					
		100 A		004250517	004252517					
125 A		004250518	004252518							
160 A		004250519	004252519		83,5	7.0				



Note 1: Other ratings and dimensions can be supplied by customer request. For particular applications, please contact ETI technical team.

Note 2: Orange colored types according to IEC 60282-1 dimensions.

* Other dimensions available upon request

Technical data

Rated voltage	Dimension "e" according to DIN and IEC	Rated current	Striker type	Rated breaking capacity	Rated minimum breaking current	Cold resistance	Power dissipation	Pre-arcing I ² t value	Total I ² t value	
[kV]	[mm]	I _n [A]		[kA]	[A]	[mΩ]	[W]	[A ² s]	[A ² s]	
10/24	292	2	C, D	31,5	12	2040	12	6,1	57	
		4			20	1300	35	17,3	164	
		6			27	900	56	36	340	
		6,3			27	900	56	36	340	
		10			42	230	25,5	165	1.450	
		16			64	125	42	320	5.200	
		20			80	76	39,5	450	7.000	
		25			100	59	49	700	10.000	
		31,5			126	52	75	1.400	15.000	
		32			126	52	79	1.400	15.000	
		40			160	38	94	3.200	27.000	
		50			200	29	110	5.800	44.000	
	63	252	21,5	137	12.000	70.000				
	442	C, D	63	1	12	3900	9			
				2	12	2040	12	6,1	57	
				4	20	1300	35	17,3	164	
				6	25	900	56	36	340	
				6,3	25	900	56	36	340	
				10	42	230	25,5	165	1.450	
				16	56	125	42	320	5.200	
				20	70	76	39,5	450	7.000	
				25	87	59	49	700	10.000	
				31,5	110	52	75	1.400	15.000	
				32	110	52	79	1.400	15.000	
40				140	38	94	3.200	27.000		
50	175	29	110	5.800	44.000					
63	220	21,5	137	12.000	70.000					
80	280	16	174	19.000	140.000					
100	355	12,9	220	35.000	202.000					
125	473	11,9	365	49.000	220.000					
537	C, D	63	2	12	2040	12	6,1	57		
			4	20	1300	35	17,3	164		
			6	25	900	56	36	340		
			6,3	25	900	56	36	340		
			10	42	230	25,5	165	1.450		
			16	56	125	42	320	5.200		
			20	70	76	39,5	450	7.000		
			25	87	59	49	700	10.000		
			31,5	110	52	75	1.400	15.000		
			32	110	52	79	1.400	15.000		
			40	140	38	94	3.200	27.000		
			50	175	29	110	5.800	44.000		
63	220	21,5	137	12.000	70.000					
80	280	16	174	19.000	140.000					
100	355	12,9	220	35.000	202.000					
125	473	11,9	365	49.000	220.000					
160	600	5,6	290	94.000	580.000					

Ordering Code Numbers

rated voltage U_n [kV]	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVA (without striker pin)	VVC3 Striker type 50N	VVT-D3 Striker type 80N THERMO		Tube diameter "d" (mm)	kg		
					Ni plated contacts	Ag plated contacts*				
442	442	2 A		004260103	004262103		53	2.3		
		4 A		004260104	004262104					
		6 A		004260105	004262105					
		6,3 A		004260106	004262106					
		10 A		004260107	004262107					
		16 A		004260108	004262108					
		20 A		004260109	004262109					
		25 A		004260110	004262110					
20/36	537	1 A	004261102				53	2.8		
		2 A	004261103	004260003	004262003	004262033				
		4 A	004261104	004260004	004262004	004262034				
		6 A	004261105	004260005	004262005	004262035				
		6,3 A	004261106	004260006	004262006	004262036				
		10 A	004261107	004260007	004262007	004262037				
		16 A	004261108	004260008	004262008	004262038				
		20 A	004261109	004260009	004262009	004262039				
	537	25 A	004261110	004260010	004262010	004262040	68	4.7		
		31,5 A	004261111	004260011	004262011	004262041				
		32 A	004261112	004260012	004262012	004262042				
		40 A	004261113	004260013	004262013	004262043				
		50 A	004261114	004260014	004262014	004262044				
		63 A	004261115	004260015	004262015	004262045			83,5	7.0
		80 A	004261116	004260016	004262016	004262046				


Note 1: Other ratings and dimensions can be supplied by customer request. For particular applications, please contact ETI technical team.

Note 2: Orange colored types according to IEC 60282-1 dimensions.

* Other dimensions available upon request



Force / travel striker pin diagram

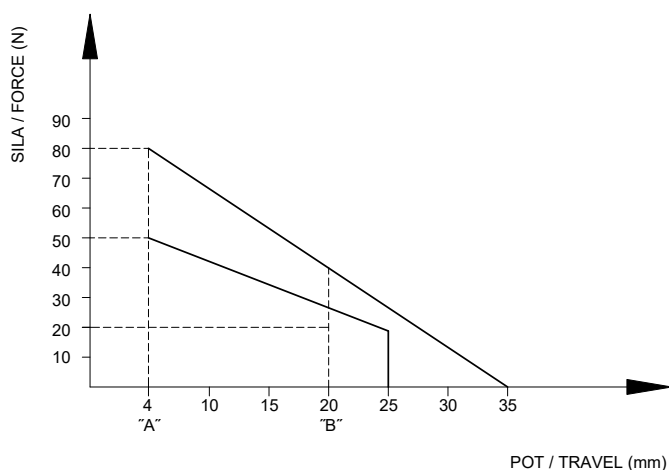

Connection in indoor switchgear, example:



WATCH THE VIDEO


How to avoid wrong HV fuse-link selection




Technical data

Rated voltage	Dimension "e" according to DIN and IEC	Rated current	Striker type	Rated breaking capacity	Rated minimum breaking current	Cold resistance	Power dissipation	Pre-arcing I ² t value	Total I ² t value	
[kV]	[mm]	I _n [A]		[kA]	[A]	[mΩ]	[W]	[A ² s]	[A ² s]	
20/36	442	2	C, D	20	12	2900	17	6,1	57	
		4			20	1870	45	17,3	164	
		6			27	1300	73	36	340	
		6,3			27	1300	73	36	340	
		10			42	320	40	165	1.450	
		16			64	185	60	320	5.200	
		20			84	110	58	450	7.000	
		25			100	85	80	700	10.000	
	537	C, D	1	31,5	12	5800	14			
			2		12	2900	17	6,1	57	
			4		20	1870	45	17,3	164	
			6		25	1300	73	36	340	
			6,3		25	1300	73	36	340	
			10		45	320	40	165	1.450	
			16		56	185	60	320	5.200	
			20		84	110	58	450	7.000	
25			87		90	77	700	10.000		
31,5			116		75	115	1.400	15.000		
32			116		75	120	1.400	15.000		
40			149		57	145	3.200	27.000		
50	175	47	145	5.800	44.000					
63	220	34	200	12.000	70.000					
80	280	25,5	270	19.000	140.000					


Cut-off current diagram for VV-Thermo fuse links

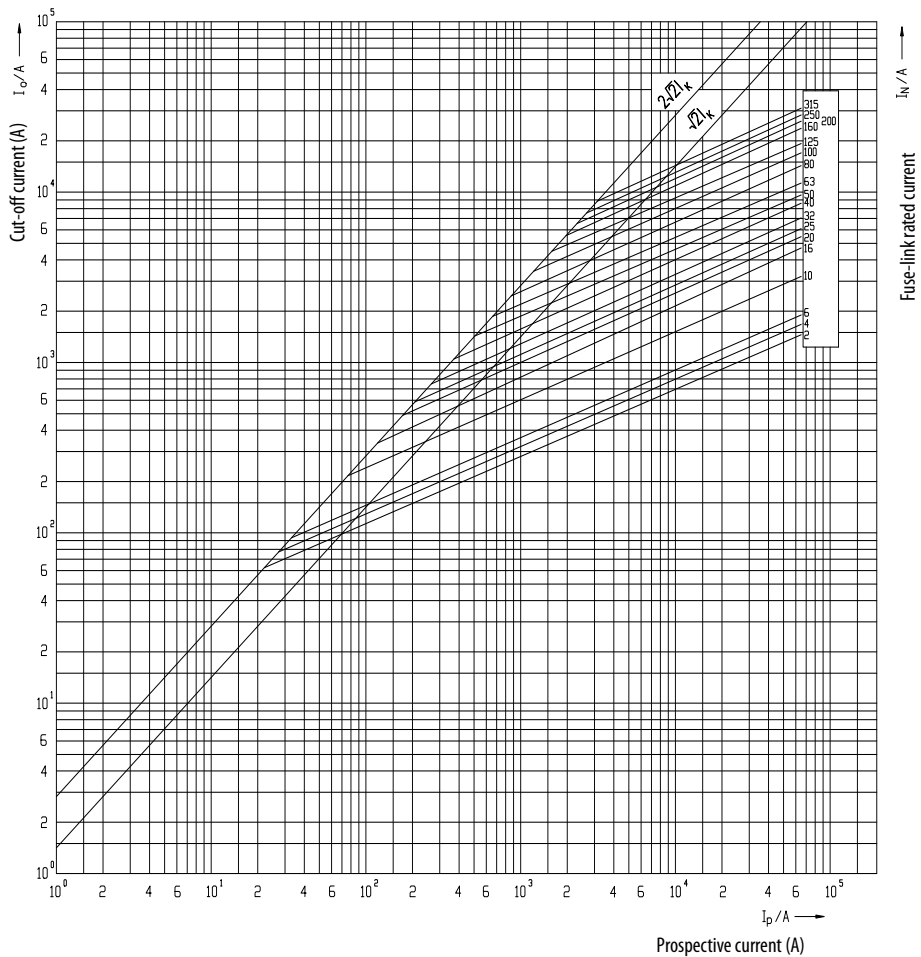


Time-current characteristics for VV-thermo fuse links - 7,2 kV

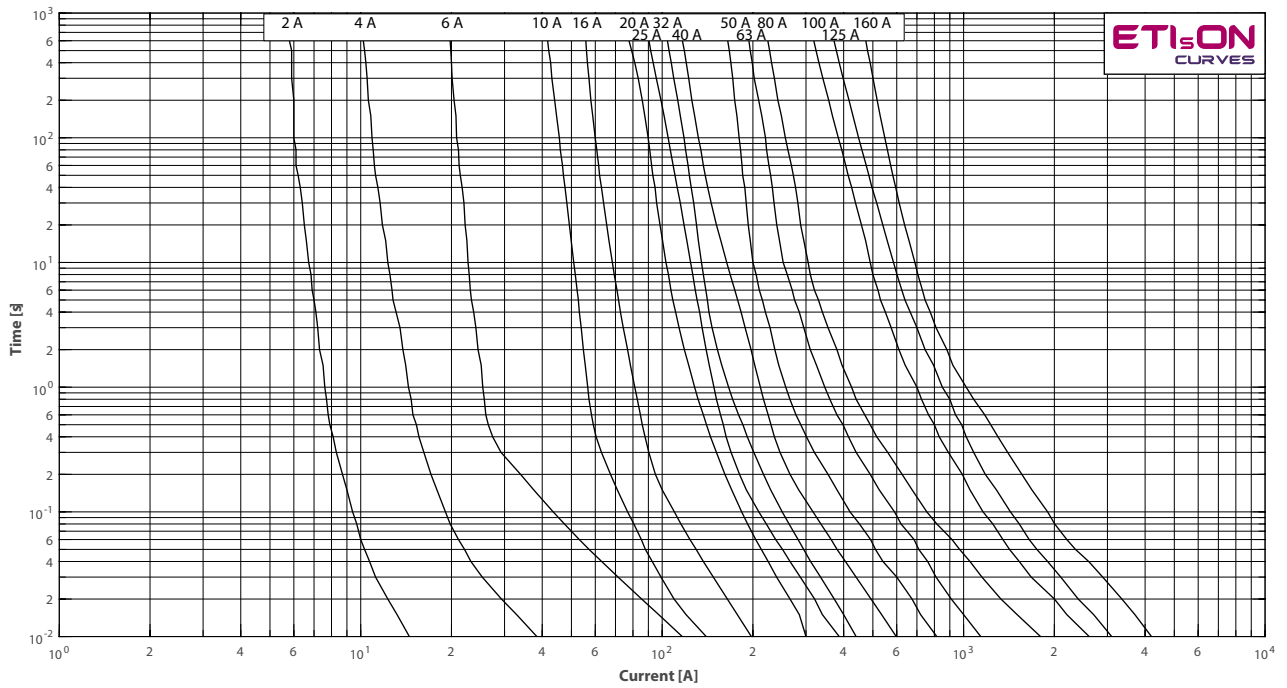


Time-current characteristics for VV-thermo fuse links - 12 kV

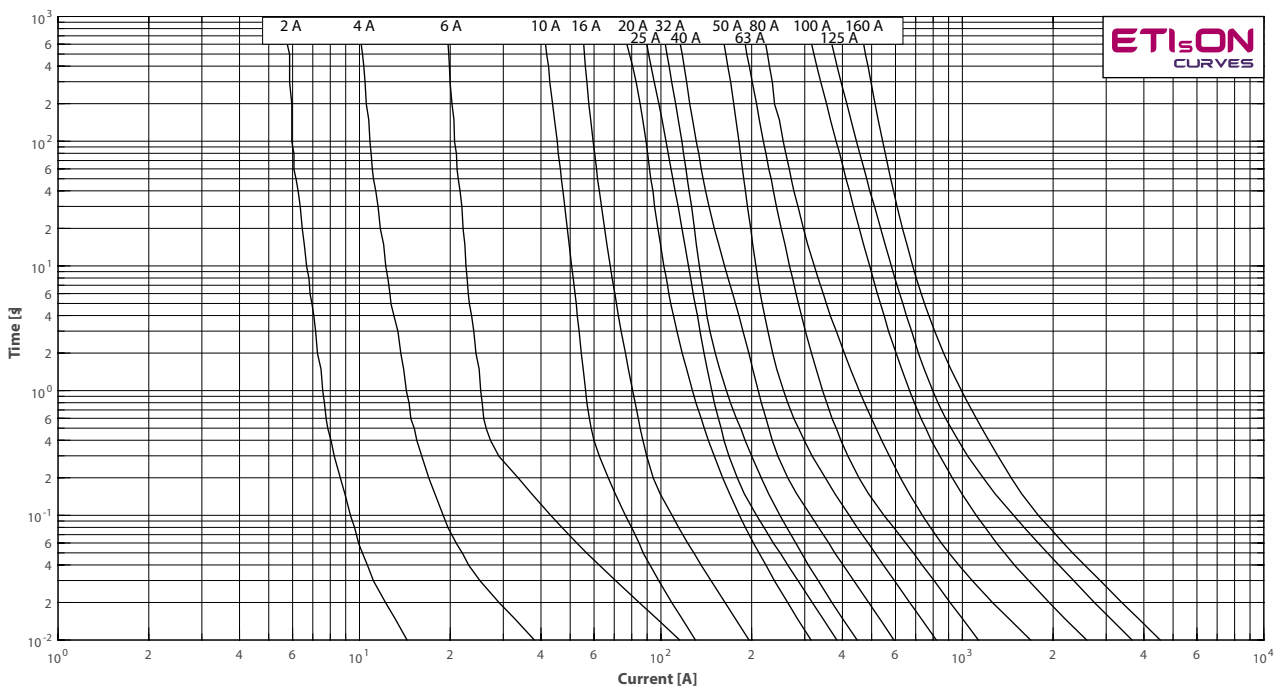

Time-current characteristics for VV-thermo fuse links - 17,5 kV

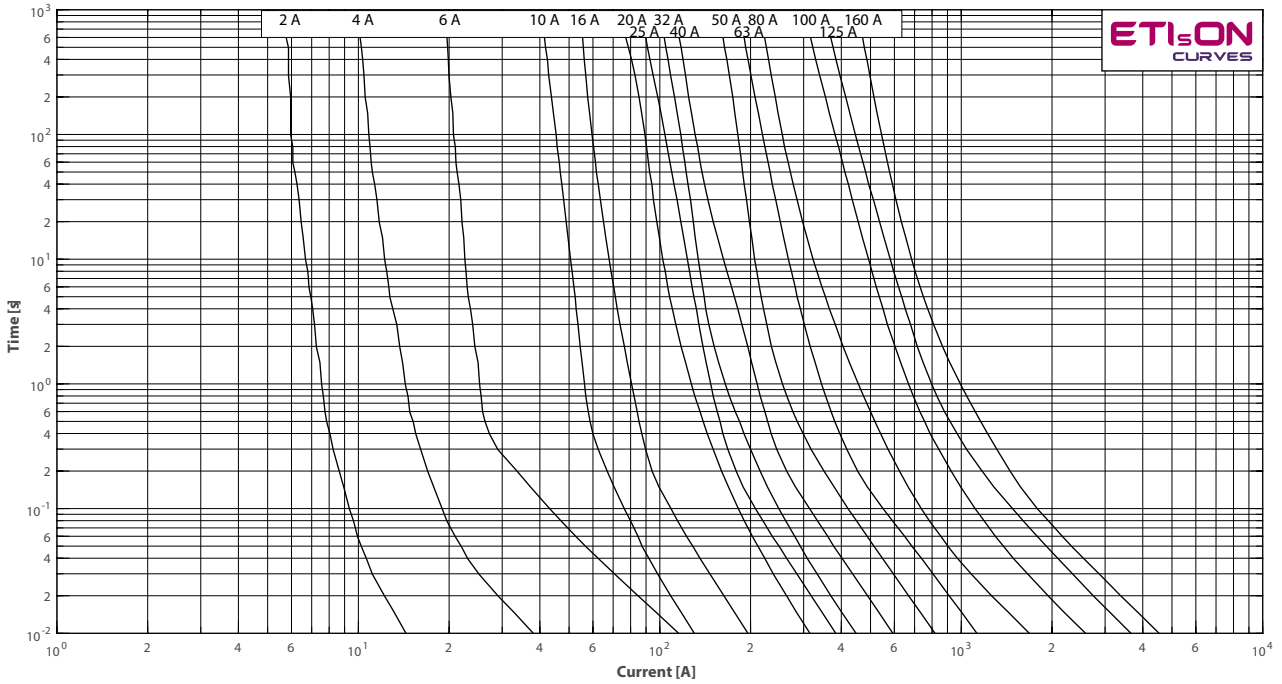


Time-current characteristics for VV-thermo fuse links - 24 kV

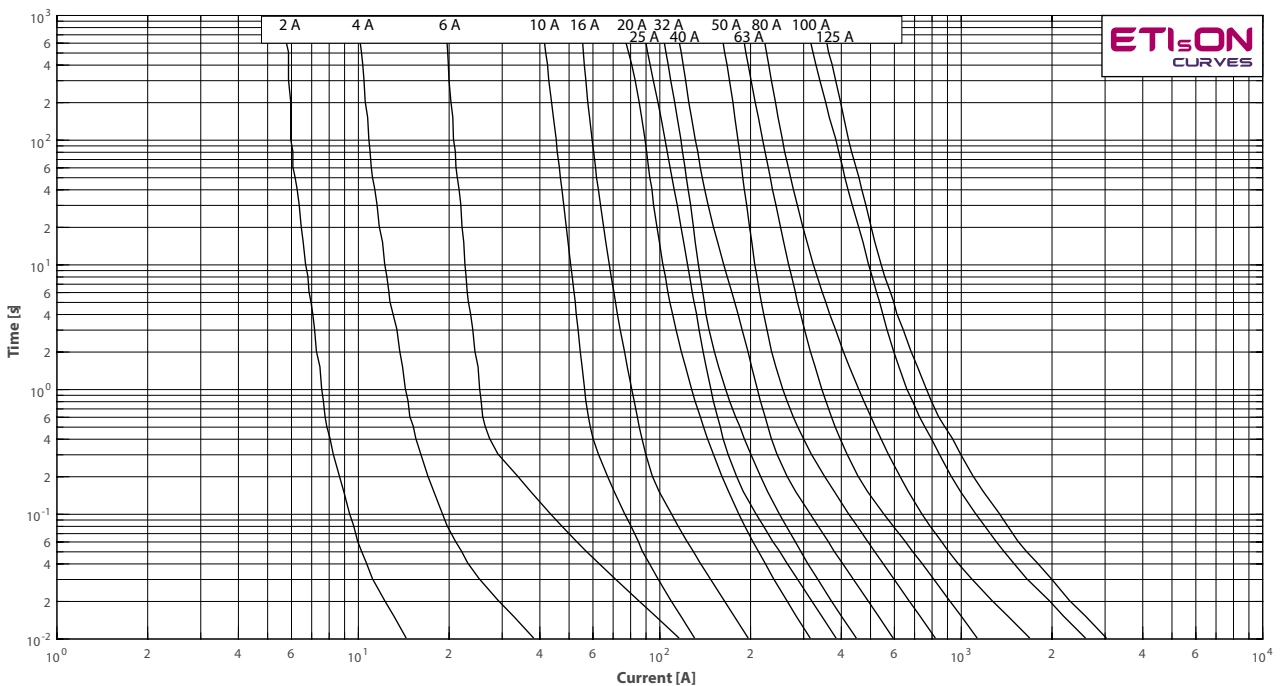


VV / High Voltage Fuse-Links

Time-current characteristics for VV-thermo fuse links - 36 kV

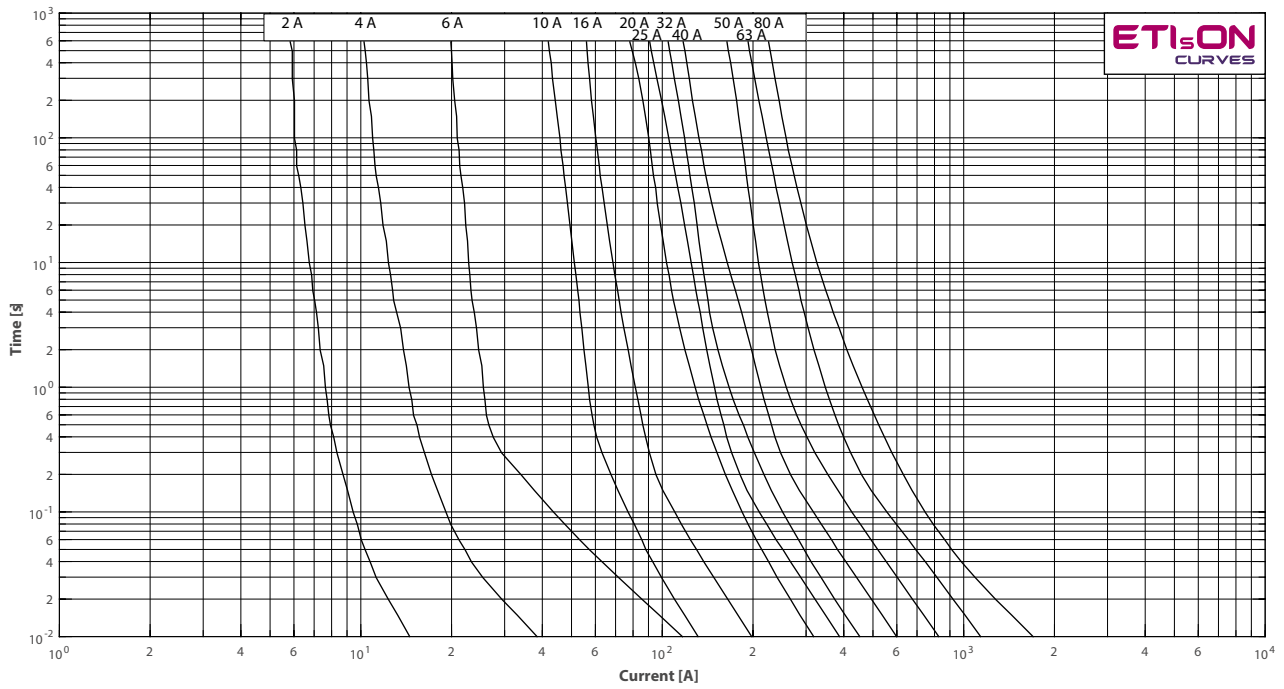


Dimensions

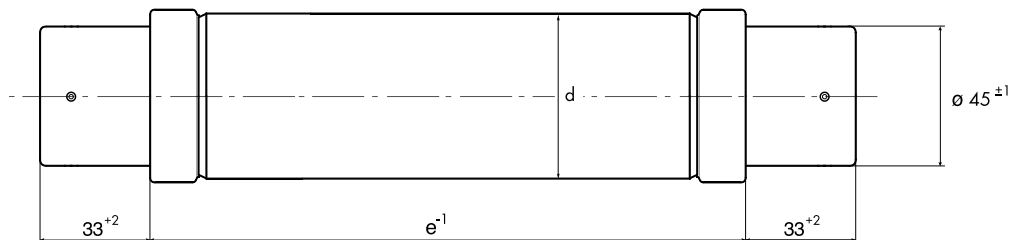

High voltage fuse-links for liquid-immersed transformers

Ordering Code Numbers


rated voltage U_n [kV]	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVT-D Striker type 80N	Tube diameter "d" (mm)		
6/12	292	2A	004236903	53	1,6	
		4A	004236904			
		6A	004236905			
		10A	004236906			
		16A	004236907			
		20A	004236908			
		25A	004236909			
		32A	004236910			
		40A	004236911			
		10/24	292			2A
4A	004256944					
6A	004256945					
10A	004256946					
16A	004256947					
442	442		2A	004256903	53	2,3
			4A	004256904		
			6A	004256905		
			10A	004256906		
			16A	004256907		
		20A	004256908			
		25A	004256909			
		32A	004256910			
		40A	004256911			




Technical data

Rated voltage [kV]	Dimension "e" according to DIN and IEC [mm]	Rated current I_n [A]	Striker type	Rated breaking capacity [kA]	Rated minimum breaking current [A]	Cold resistance [mΩ]	Power dissipation [W]	Pre-arcing I^2t value [A ² s]	Total I^2t value [A ² s]	
6/12	292	2A	VVT-D	50	12	980	6	6,1	57	
		4A			20	650	15	17,3	164	
		6A			25	435	21	36	340	
		10A			46	87	8	161	1530	
		16A			60	60,5	19	250	2270	
		20A			80	47	22	430	3750	
		25A			105	37	34	650	5500	
		32A			130	27	43	1220	10100	
		40A			178	21	54	2270	18100	
		10/24			292	2A	VVT-D	50	12	2040
4A	20		1300	35		17,3			164	
6A	25		900	56		36			340	
10A	46		160	19		161			1530	
16A	60		106	35		250			2270	
442	442		2A	VVT-D	50	12	2040	12	6,1	57
			4A			20	1300	35	17,3	164
			6A			25	900	56	36	340
			10A			46	160	19	161	1530
			16A			60	106	35	250	2270
		20A	80	85	44	430	3750			
		25A	105	67	58	650	5500			
		32A	130	48	71	1220	10100			
		40A	178	37,5	95	2270	18100			

Time-current characteristics for VV-thermo fuse links - 36 kV

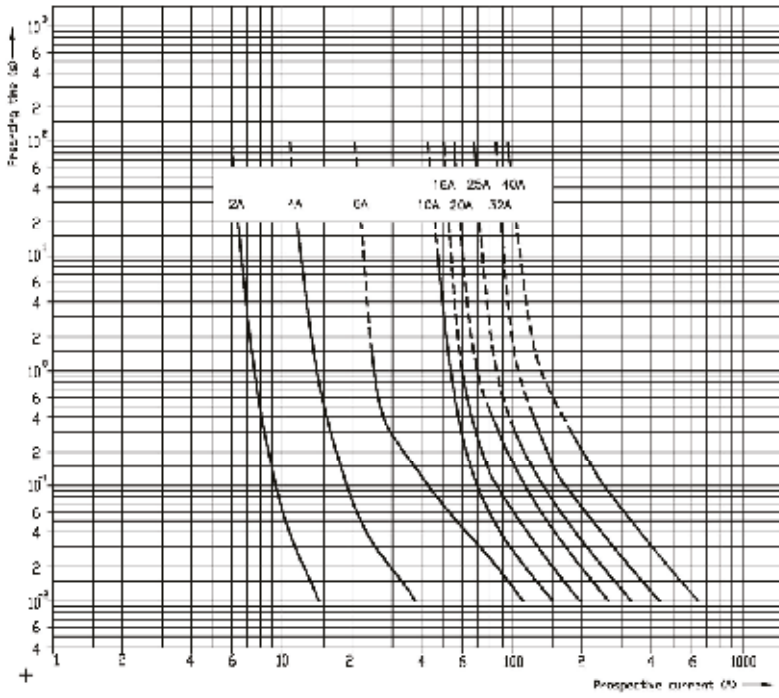

Dimensions

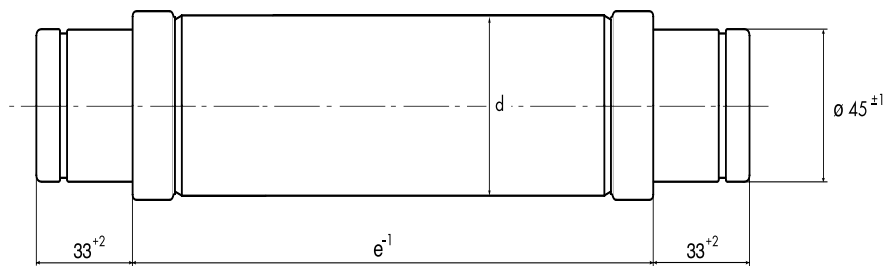

High voltage fuse-links for protection of voltage transformers




Ordering Code Numbers

rated voltage	Dimension "e" according to DIN and IEC (mm)	rated current [A]	VVT-D	Tube diameter "d" (mm)	kg
U_n [kV]					
10/24	235	2A	004251033	54	1,45
		4A	004251034		

Technical data

Rated voltage	Dimension "e" according to DIN and IEC	Rated current	Striker type	Rated breaking capacity	Rated minimum breaking current	Cold resistance	Power dissipation	Pre-arcing I^2t value	Total I^2t value
[kV]	[mm]	I_n [A]		[kA]	[A]	[mΩ]	[W]	[A ² s]	[A ² s]
10/24	235	2A	/	20	12	2040	14	6,1	57
		4A			20	1300	38	17,3	164

Dimensions

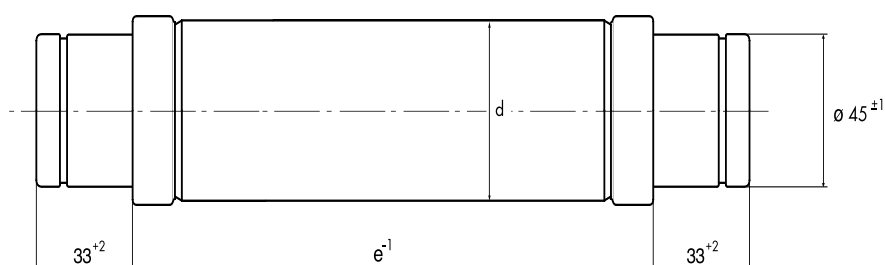




High Voltage Fuse Bases

Fuse bases for VV fuse-links

1-pole Indoor mounting

type	Rated voltage [kV]	code No.	Dimension "e" according to DIN and IEC [mm]	
VVP 7,2 1p-N	7,2	004229010	192	1
VVP 12 1p-N	12	004239010	292	1
VVP 17,5 1p-N	17,5	004249010	367	1
VVP 24 1p-N	24	004259010	442	1
VVP 36 1p-N	36	004269010	537	1

* when choosing right fuse base consider size and rated voltage of fuse-link


** due to safety reasons fuse bases cannot be later adjusted on different length by a user

*** indoor edition of fuse base may not be used for outside applications

**** Max thermal current: 100A, used with ETI VVT TD3 fuse-links.



1-pole Indoor mounting with microswitch fuse monitoring


type	Rated voltage <<< [kV]	code No.	Dimension "e" according to DIN and IEC [mm]	
VVP 7,2 1p-N + NK 7,2 BSW	7,2	004349019	192	1
VVP 12 1p-N + NK 12 BSW	12	004349020	292	1
VVP 17,5 1p-N + NK 17,5 BSW	17,5	004349021	367	1
VVP 24 1p-N + NK 24 BSW	24	004349022	442	1
VVP 36 1p-N + NK 7,2 BSW	36	004349023	537	1

* when choosing right fuse base consider size and rated voltage of fuse-link


** due to safety reasons fuse bases cannot be later adjusted on different length by a user

*** Rotation in installation is allowed only with the pin striker pointing upward (as in the photo on the right)

**** Max thermal current: 100A, used with ETI VVT TD3 fuse-links.

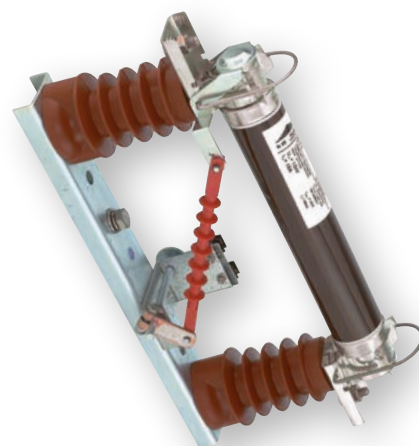

1-pole Outdoor mounting

type	Rated voltage [kV]	code No.	Dimension "e" according to DIN and IEC [mm]	
VVP 7,2 1p-Z	7,2	004229030	192	1
VVP 12 1p-Z	12	004239030	292	1
VVP 17,5 1p-Z	17,5	004249030	367	1
VVP 24 1p-Z	24	004259030	442	1
VVP 36 1p-Z	36	004269030	537	1

* when choosing right fuse base consider size and rated voltage of fuse-link


** due to safety reasons fuse bases cannot be later adjusted on different length by a user

**** Max thermal current: 100A, used with ETI VVT TD3 fuse-links.




Accessories


Accessories for VVP fuse bases

type	Rated voltage [kV]	code No.	
Fixing plate for VVP 7,2 3p-N, INDOOR	7,2	004229020	1
Fixing plate for VVP 12 3p-N, INDOOR	12	004239020	1
Fixing plate for VVP 17,5 3p-N, INDOOR	17,5	004249020	1
Fixing plate for VVP 24 3p-N, INDOOR	24	004259020	1
Fixing plate for VVP 36 3p-N, INDOOR	36	004269020	1
Fixing plate for VVP 12 3p-Z, OUTDOOR	12	004239040	1
Fixing plate for VVP 24 3p-Z, OUTDOOR	24	004259040	1
Microswitch NK 7,2 BSW, INDOOR	7,2	004349007	1
Microswitch NK 12 BSW, INDOOR	12	004349008	1
Microswitch NK 17,5 BSW, INDOOR	17,5	004349009	1
Microswitch NK 24 BSW, INDOOR	24	004349010	1
Microswitch NK 36 BSW, INDOOR	36	004349011	1
VV universal clip with tail, prepared for M10 screw connection	7,2 - 36	004349015	1
VV universal clip	7,2 - 36	004349016	1


Fixing plate is used for combining 1-pole fuse bases into 3-pole fuse bases.

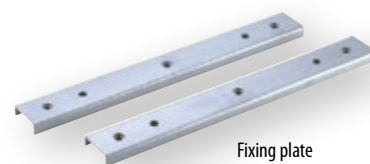

Fixing plate
to obtain 3p fuse base (2 fixing
plates are needed)



Microswitch

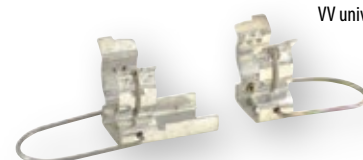

VV universal clip


VV universal clip with tail

VV / High Voltage Fuse Bases



1-pole fuse-base	microswitch	U _n [kV]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	M [mm]	H [mm]	K [mm]	"e" Fuse length	Version
INDOOR MOUNTING	✗	7,2	445	405	225	150	203	259	324	83	356	192	1
	✓	7,2	445	405	225	152	202	253	316	83	356	192	1
	✗	12	405	205	325	150	203	259	424	83	456	292	2
	✓	12	405	205	325	152	202	253	416	83	456	292	2
	✗	17,5	480	280	397	245	298	354	496	80	528	367	2
	✓	17,5	480	235	397	191	242	293	488	83	528	367	2
	✗	24	555	355	475	245	298	354	574	80	606	442	2
	✓	24	555	355	475	245	295	346	566	77	606	442	2
	✗	36	670	350	570	330	383	439	670	80	701	537	2
	✓	36	670	350	570	339	389	440	661	80	701	537	2
OUTDOOR MOUNTING	✗	7,2	445	405	225	306	359	415	324	127	356	192	1
	✗	12	405	205	235	306	359	415	424	127	456	292	2
	✗	17,5	480	280	397	306	359	415	496	127	528	367	2
	✗	24	555	355	475	306	359	415	574	127	606	442	2
	✗	36	670	350	570	509	562	618	670	120	701	537	2

Dimensions


Version 1

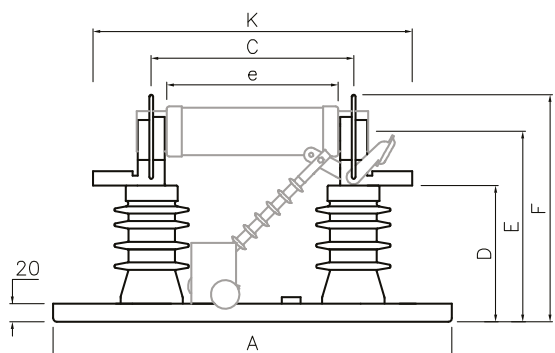

Version 2

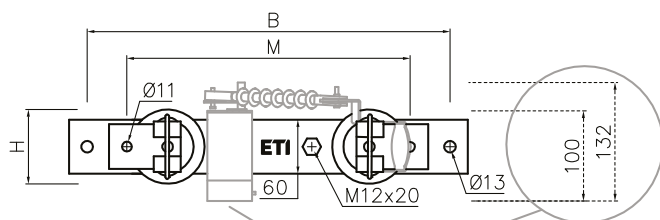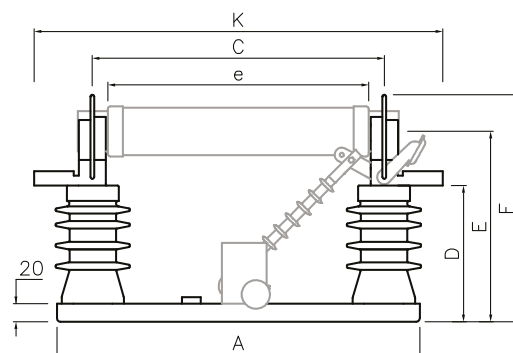

OPTION: MICROSWITCH SYSTEM (GREY LINE)

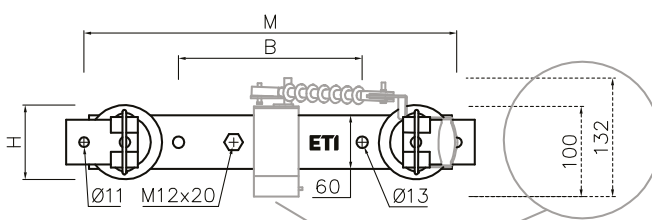

OPTION: MICROSWITCH SYSTEM (GREY LINE)

Definitions and terms

Back-up fuse-links

According to standard IEC 60282-1 Fifth edition (2002-01), item 3.3.3, Back-up fuse is current-limiting fuse capable of breaking, under specified conditions of use and behaviour, all currents from the rated maximum breaking current (I_1) down to the rated minimum breaking current (I_3).

Back-up fuse links should not operate below their minimum breaking current. If the short-circuit current of the transformer is lower than the minimum breaking current, additional protection must be provided.

Rated voltage range voltages

ETI VV Thermo fuse-links must be operated at the rated voltage. At lower operating voltages without limitation provided, please contact ETI team.

Breaking capacity I_1

This value (sometimes named "rated maximum breaking current" of current indicates, that this is the maximum current which can be interrupted by the fuse-link. I_1 should be greater than the maximum expected short circuit current at the fuse-link site.

Minimum breaking current I_3

This value (sometimes named "rated minimum breaking current" is specified for Back-up fuse-links. Up from this current, fuse-link is capable to breaking fault current.

Power dissipation of a fuse-link P_n

The power dissipation of a VV Thermo fuse-link is specified at the rated current of the fuse-link. For calculations of protection with VV Thermo fuse-link, it should be noted, that operating current is normally below half of the rated current.

Time-current characteristics

I/t characteristics represents the correlation between current and time up to the melting of a silver fuse element. For coordination with other protection devices, melting integral must be referred for melting times below 100ms.

Current limitation

This is most significant advantage of fuse-links compared to mechanical switches. Contacts of that switches need much longer time as fuse-link to interrupt fault currents. VV fuse-link interrupt fault current within few milliseconds and sinusoidal current does not reach its peak value.

Switching voltages

Between current-limiting process, short circuit current must be limited and reduced as soon as possible. This require a switching voltage that exceed the normal system voltage and force the current to zero. Permissible value of switching voltage is 2.2 times peak value of the maximum rated voltage.

Selection of fuses for transformer protection

For HV fuse-link rated current selection, following transformer technical features has to be known:

- // Rated power P_n (kVA)
- // Short-circuit voltage U_{cc} (%)
- // Rated current I_{nt}
- // Inrush current usually between $8-12 \times I_{nt}$
- // Short-circuit current I_{cc}
- // Overload current usually $1.4 I_{nt}$
- // Maximum short-circuit duration. Standard 2 sec for transformers up to 630 kVA and 3 sec for higher rated powers

Following HV fuse-link technical features has to be known:

- // Rated voltage U_n (kV)
- // Rated current I_n (A)
- // I/t Characteristics According to the curves
- // Melting current (0.1sec) I_f (0.1sec)
- // Melting current at 2sec or 3sec melting time
- // Minimum breaking current I_3 (A)
- // Breaking capacity I_1 (kA)

General about transformer protection:

- // Fuse-link rated voltage U_n must be higher than network voltage.
- // Maximum fuse-link breaking current I_1 must be higher than short circuit-current I_{cc} .
- // Inrush current should not melt the fuse-link. Melting current at 100 msec must be higher than 12 times transformer rated current
- // Fuse-link has to operate before the expected short-circuit current damage the transformer $I_{cc} > I_f$ (2 sec) or $I_{cc} > I_f$ (3 sec)
- // Fuse-link must be able to withstand possible short duration overloads. $I_n \text{ FUSE} > 1.4 I_n \text{ TRAFO}$

Transformer rated capacity Pt (kVA)	6/7,2 kV				10/12 kV				15/17,5kV				20/24 kV				30/36 kV			
	Transformer rated primary current Ip(A) at	HV Fuse-link rated current		LV Fuse-Link gG/LV Fuse-Link gG	Transformer rated primary current Ip(A) at	HV Fuse-link rated current		LV Fuse-Link gG/LV Fuse-Link gG	Transformer rated primary current Ip(A) at	HV Fuse-link rated current		LV Fuse-Link gG/LV Fuse-Link gG	Transformer rated primary current Ip(A) at	HV Fuse-link rated current		LV Fuse-Link gG/LV Fuse-Link gG	Transformer rated primary current Ip(A) at	HV Fuse-link rated current		LV Fuse-Link gG/LV Fuse-Link gG
		Ihv	(A)			(kVA)	(A)			(A)	(A)			(kVA)	(A)			(A)	(A)	
50	4,8	10	50	72	2,9	6	50	72	1,9	6	50	72	1,4	4	50	72	1,0	4	50	72
75	7,2	16	75	108	4,3	10	80	108	2,9	6	80	108	2,2	6	80	108	1,4	4	80	108
100	9,6	20	100	144	5,8	10	100	144	3,8	10	100	144	2,9	6	100	144	1,9	6	100	144
125	12,0	20	125	180	7,2	16	125	180	4,8	10	125	180	3,6	10	125	180	2,4	6	125	180
160	15,3	25	160	231	9,2	20	160	231	6,2	16	160	231	4,6	10	160	231	3,1	6	160	231
200	19,2	32	200	289	11,5	20	200	289	7,7	16	200	289	5,8	10	200	289	3,8	10	200	289
250	24,0	40	250	361	14,4	25	250	361	9,6	20	250	361	7,2	16	250	361	4,8	10	250	361
315	30,3	50	315	455	18,2	32	315	455	12,1	20	315	455	9,1	16	315	455	6,0	16	315	455
400	38,5	63	400	577	23,1	40	400	577	15,4	25	400	577	11,5	20	400	577	7,7	16	400	577
500	48,1	80	500	722	28,8	50	500	722	19,2	32	500	722	14,4	20	500	722	9,6	20	500	722
630	60,6	100	630	909	36,4	63	630	909	24,2	40	630	909	18,2	25	630	909	12,1	20	630	909
800	77,0	100	800	1.155	46,2	80	800	1.155	30,8	50	800	1.155	23,1	40	800	1.155	15,4	25	800	1.155
1000	96,2	125	1.000	1.443	57,7	80	1.000	1.443	38,5	63	1.000	1.443	28,9	50	1.000	1.443	19,2	32	1.000	1.443
1250	120,0	160	1250	**	72,2	100	1250	**	48,1	80	1250	**	36,1	63	1250	**	24,0	40	1250	**
1600	154,0	200*	1600	**	92,4	125	1600	**	61,6	100	1600	**	46,2	63	1600	**	30,8	50	1600	**
2000	192,5	250*	**	**	115,5	160	**	**	77,0	100	**	**	57,7	80	**	**	38,5	63	**	**

