



AFDD

New Series of Arc Fault Detection Devices

**Complete protection - MCB, RCCB
and AFDD in one device**



**Overcurrent and short circuit
protection of both poles**

**Universal connection - supply is possible
both from top and bottom terminals**


Thinking of safety - so you don't have to



Advantages of the new AFDD

✦ Complete protection: MCB, RCCB and AFDD in one device

✦ Supply is possible both from top and bottom terminals



✦ All necessary technical & installation information can be found on the front of the device

✦ Rated short circuit capacity: 10 kA





✦ Test button enables user to check residual functionality

✦ LED indication of various types of fault (see table)



✦ Better protection of terminals against touching the parts under voltage

✦ Overcurrent and short circuit protection of both poles

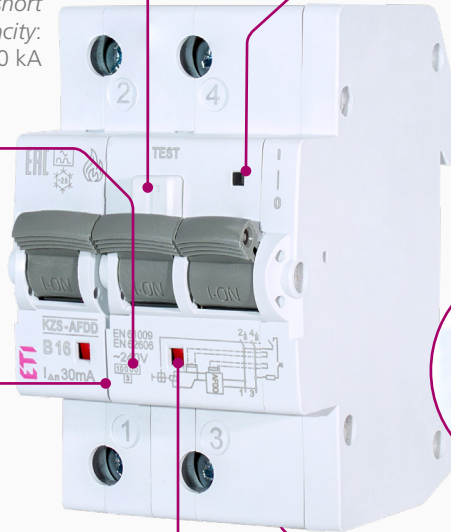

✦ Real contact position indication for easier identification, whether the device is in ON or OFF position

✦ Clearly marked terminals to ensure appropriate connection

✦ High mechanical endurance: 20.000 cycles

✦ High electrical endurance: 10.000 cycles

Technical features

Technical data KZS - AFDD 3M2p	
Electrical	
Rated Voltage U_n	240 V AC
Rated current I_n	6, 10, 13, 15, 16, 20, 25, 32 A
Rated residual operating current $I_{\Delta n}$	30 mA
Rated frequency f_n	50Hz
Type	A
Tripping characteristic	B, C
Rated short-circuit capacity	10kA
Rated insulation voltage U_i	440 V
Rated impulse withstand voltage U_{imp}	4kV (1,2/50ms)
Peak withstand current	3kA (8/20ms) surge current proof
Voltage range test circuit	135-264V
Min operating voltage for AFDD function	180V
Rated residual making and breaking capacity I_{dm}	4500A
Electrical isolation	> 4mm contact space
Max back-up fuse	100A gG
Insulating class	B
Standards	IEC/EN 61009-1, IEC/EN 62606
Mechanical Endurance	20.000
Electrical endurance	10.000
Mechanical	
Frame size	45mm
Device height	69 mm
Device width	53.5 mm
Degree of protection	IP20
Upper and lower terminals	open mounted/lift terminals
Terminal capacity	1-25 mm ²
Terminal screw	M5 (Pozidrive PZ2)
Terminal torque	max 3,0 Nm
Operating temperature	-25°C ... +50°C
Storage and transport temperature	-40°C ... +70°C
Resistance to climatic conditions	IEC/EN 61009-1
Shock resistance	Acc to IEC/EN 61009-1
Resistance to vibrations acc. to IEC60068-2-7	5g (10,60 & 500Hz)
Contact position indicator	mechanical red/green
Supply possibility	Top or bottom
Mounting on the rail	35mm acc to EN60715
Mounting position	any

Self-Test function explanation

✦ How often does Self-test function perform on the AFDD?
Every time it is powered and then once every minute while powered.

✦ What happens in the case that Self-test function is not positive, so if it fails this test, the AFD function does not work anymore?


If the self-test (automatically initiated test function) fails then the AFDD outputs a trip command. The self test checks the AFD function so if it fails then the AFD function is not operating correctly.

✦ In the case of failing Self-test fault what happens further: Does the AFDD trip immediately or does it trip after relatching the switch, or does not trip and just signalizes?

After a self-test failure the device will trip. Upon re-latching the AFDD signals the self-test fault by flashing the LED as described for the self-test fault below, it then does a self-test and if the result is a fail it will trip. If the AFDD cannot trip due because the tripping means is compromised (e.g. damaged PMR) it will continuously flash the LED (self-test fault) as long as it remains powered. If the self-test is a pass after re-latching then the flashing LED will cancel after 25 seconds.


conductor cross-section [mm ²]	Number of single conductors, rigid, single-wire Cu conductor				
	1	2	3	4	5
1,5	✓	✓	✓	✓	✗
2,5	✓	✓	✓	✗	✗
4	✓	✓	✓	✗	✗
6	✓	✓	✗	✗	✗
10	✓	✓	✗	✗	✗
16	✓	✗	✗	✗	✗
25	✓	✗	✗	✗	✗

Remark: When you use more than 2 cables you have to be careful how those cables are inserted, due to insure proper pressure on each cable



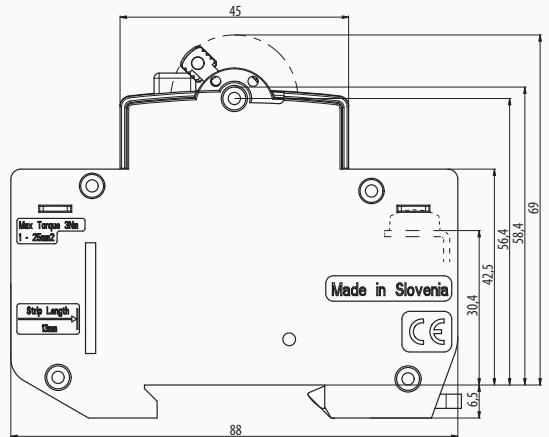



conductor cross-section [mm ²]	Number of single conductors, flexible Cu conductors					
	1	2	3	4	5	6
1,5	✓	✓	✓	✓	✓	✓
2,5	✓	✓	✓	✓	✓	✓
4	✓	✓	✓	✓	✓	✓
6	✓	✓	✓	✗	✗	✗
10	✓	✓	✗	✗	✗	✗
16	✓	✗	✗	✗	✗	✗
25	✓	✗	✗	✗	✗	✗


Combination of rigid single-wire and flexible multi-wire Cu conductors is not allowed

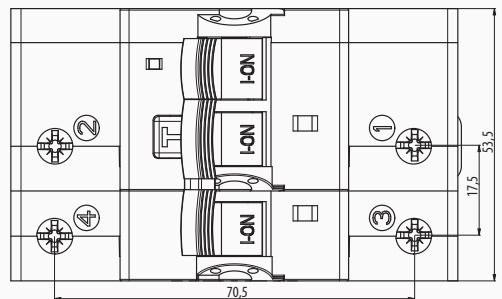


I_n [A]	Power dissipation P/pole [W]	Rh [mΩ]	Rh/pole [mΩ]
6	1,5 - 1,7	126	63
10	1,6 - 1,8	86	43
13	1,8 - 2,0	60	30
16	1,9 - 2,2	48	24
20	2,2 - 2,4	40	20
25	2,8 - 3,1	34	17
32	4,0 - 4,4	24	12

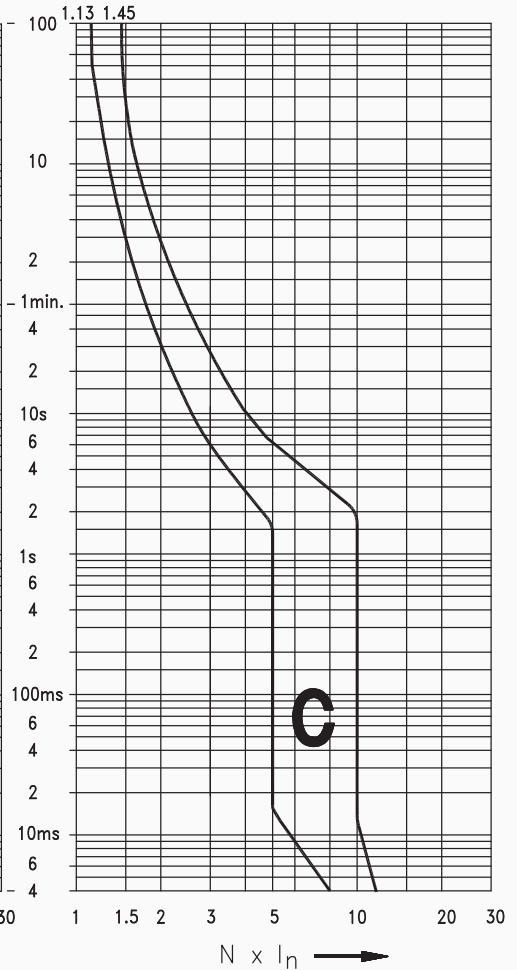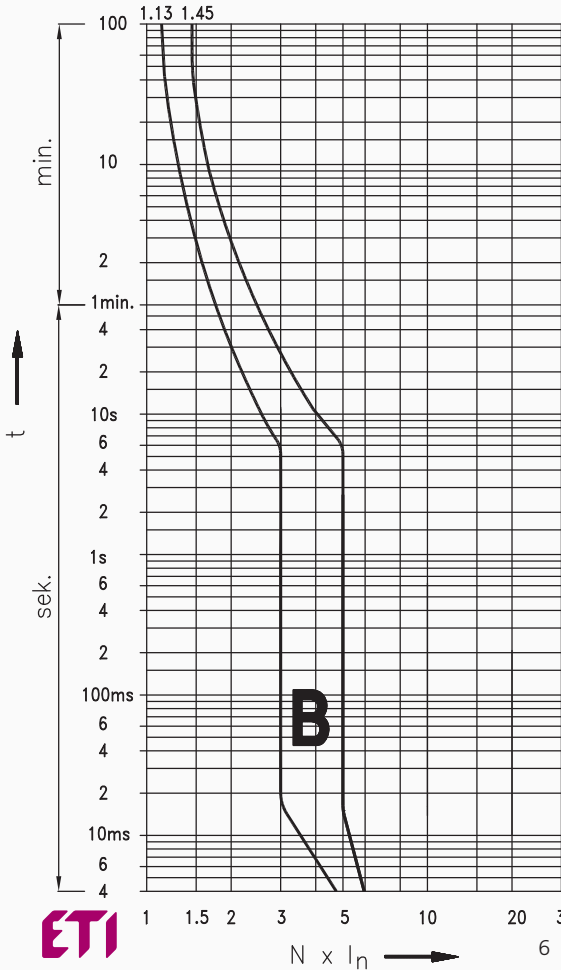

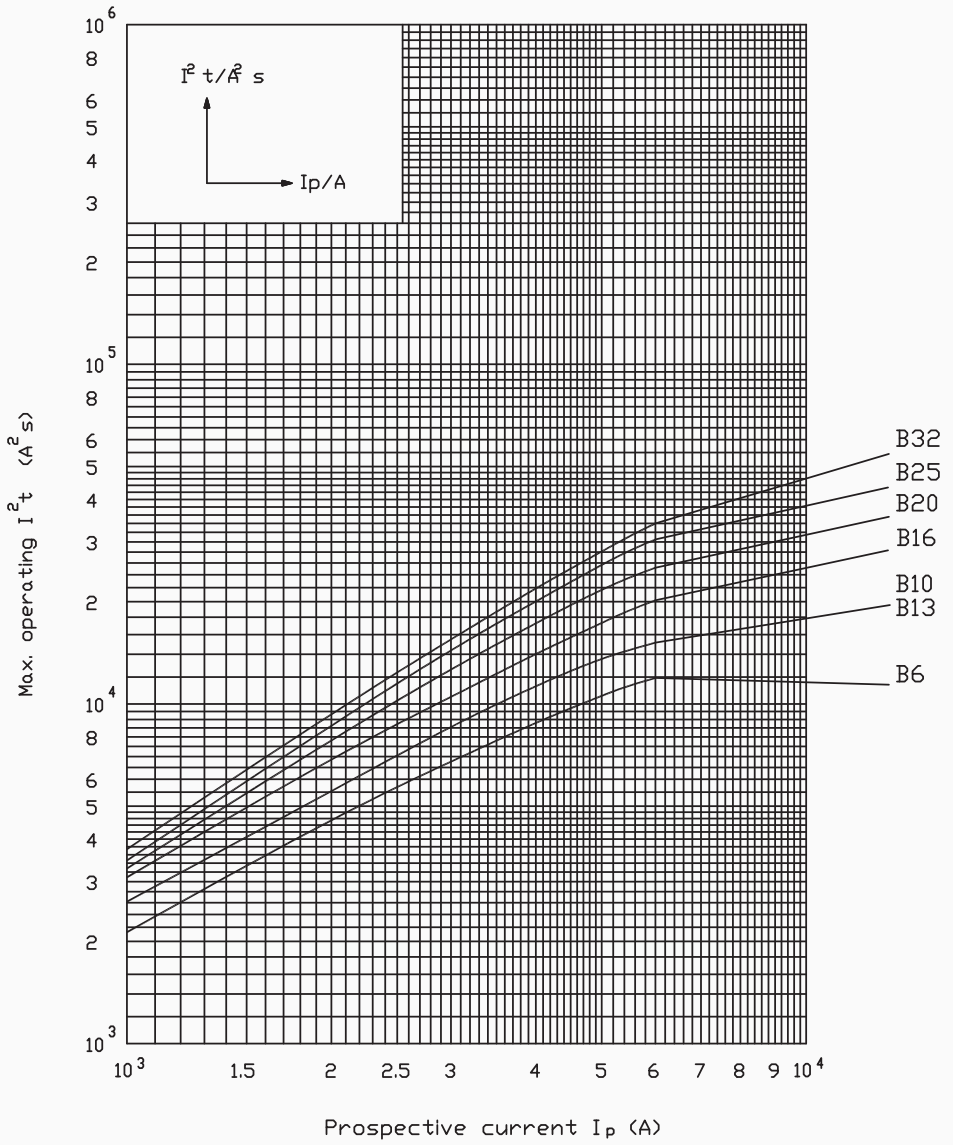

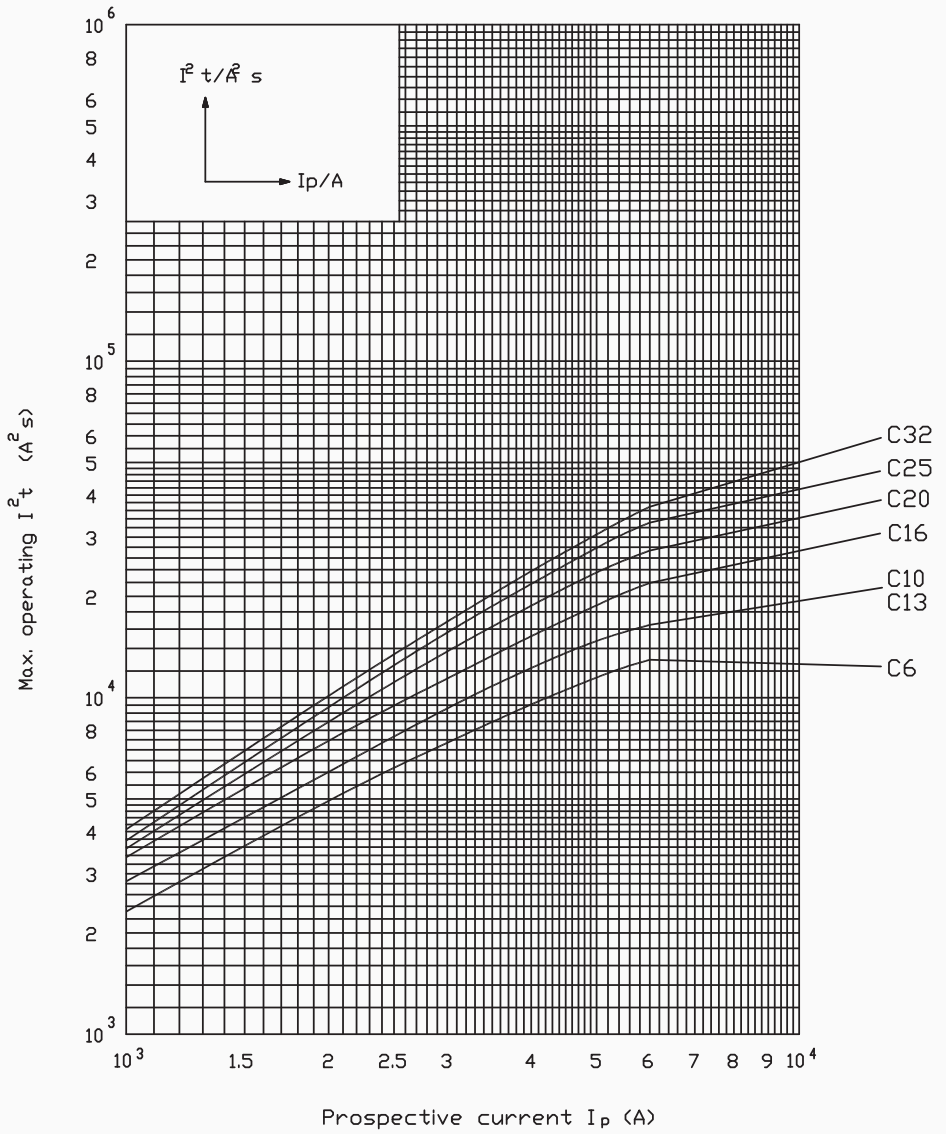

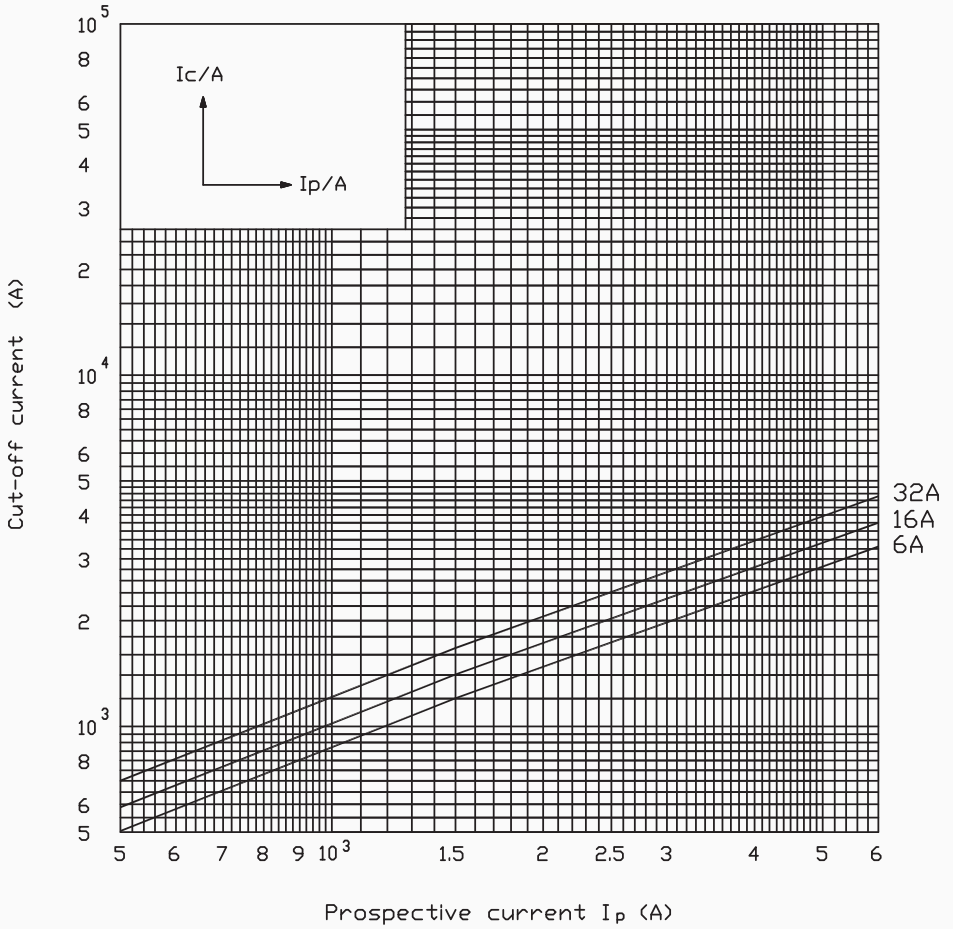

ETI group



www.etigroup.eu

PARENT COMPANY

ETI D.O.O.
Obrezija 5, 1411 Izlake, Slovenia
Phone: +386 3 5657 570
E-mail: eti@eti.si
<http://www.etigroup.eu>
<http://www.eti.si>

ETI POLAM SP. Z O.O.
Ul. Jana Pawla II 18, 06100 Pułtusk, Poland
Phone: +48 23 691 93 00
E-mail: etipolam@etipolam.com.pl
<http://www.etipolam.com.pl>

ETI HU ELEKTROTECHNIKAI, KFT.
Rokolya utca 25, 1131 Budapest, Hungary
Phone: +36 1 238 0784
E-mail: eti@eti-hu.hu
<http://www.eti-hu.hu>

ETI SARAJEVO D.O.O.
Hifzi Bjelevca 13, 71 000 Sarajevo, BiH
Phone: +387 33 77 52 50
E-mail: etisa@bih.net.ba
<http://www.eti.ba>

ETI RUSSIA
St. Ugreshskaya d. 2, Moscow, Russia
Tel: +7 (495) 665-34-80
E-mail: info@etirus.ru
www.etimoskva.ru

ASSOCIATED COMPANIES

ITALWEBER S.P.A.
Via Enrico Fermi 40/42, 20090 Assago, Italy
Phone: +39 02 939 771
E-mail: info@italweber.it
<http://www.italweber.it>

ETI ELEKTROELEMENT S.R.O.
Paceříčká 2773/1
9300 Praha - Horní Počernice
Phone: +420 777 950 203
E-mail: jan.tichy@etielektroelement.cz

ETI ROMANIA S.R.L.
Str. Doina, Nr. 17, Sector 5, Bucharest, Romania
Phone: +40 (0)21 317 1743
E-mail: eti.electrice@gmail.com
<http://www.etigroup.ro>

SUBSIDIARIES

ETI PROPLAST D.O.O.
Obrezija 5, 1411 Izlake, Slovenia
Phone: +386 3 56 57 590
E-mail: etiproplast@eti.si
<http://www.etiproplast.si>

ETI UKRAINE, LTD
Ul. Akademika Tupoleva 19,
04128 Kiev, Ukraine
Phone: +380 44 494 21 80
E-mail: office@eti.ua
<http://www.eti.ua>

ETI ELEKTROELEMENT D.O.O.
For technical engineering and store
of electrotechnical products
Ulica grada Vukovara 235/V,
10000 Zagreb, Croatia
<http://www.eti.si/hr>

ETI ELEKTROTECHNIK GMBH
Dorfwiesweg 13, 63828 Kleinkahl, Germany
Phone: +49 6024 6397-0
E-mail: contact@eti-de.de
<http://www.eti-de.de>

ETIBALTUS, UAB
Tilzes 41a, 47187 Kaunas, Lithuania
Phone: +370 37 261 582
E-mail: info@etibaltus.lt
<http://www.etibaltus.lt>

ETI PROSTIK D.O.O.
Obrezija 5, 1411 Izlake, Slovenia
Phone: +386 3 56 57 463
E-mail: etiprostik@eti.si

ETI B
Zvečanska 56/17
11000 Beograd, Serbia
Phone: +381 (0)11 3961 688
E-mail: miodrag.stojkovic@etib.rs
<http://www.etib.rs>